





**REACTANCIAS ARRANQUE  
RAPIDO ALTO FACTOR**

**20 - 65W**  
**230V / 50 Hz**

**RSAF ( Semirresonante, una lámpara )**
**EN 60920-60921 tw 130**

TIPO	REACTANCIA						LAMPARA			CARACTERISTICAS FISICAS			
	LAMPARA		V / Hz	Inductivo $\lambda$	Temp. $\Delta t / \Delta t_{an.}$	Esquemas	Dimensión ( mm )	$\varnothing$	Casquillo	DIMENSIONES		Peso ( grs. )	Unidades Embalaje
	Potencia ( W )	Intensidad ( A )								A ( mm )	B ( mm )		
RSAF 20/23	20	0,370	230/50	0,90	60/140	8	590	38	G13	245	140	950	20
RSAF 40/23	40	0,430	230/50	0,90	55/140	8	1200	38	G13	245	140	950	20
RSAF 65/23	65	0,670	230/50	0,90	65/150	8	1500	38	G13	245	140	1100	20

Otras tensiones o frecuencias disponibles bajo demanda

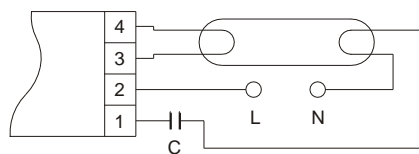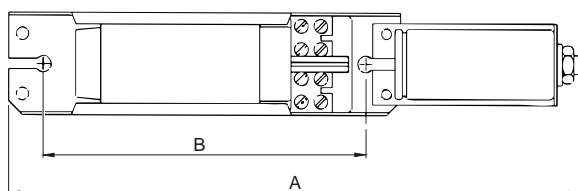

8