


**ARC-A : AUTOTRANSFORMER
BALLASTS
FOR FLUORESCENT LAMPS**

 Standard Cross-Section **37 x 40**




 Push-in terminal \square 0,5 - 1 mm²

 Screw terminal 0,5 - 2,5mm²
13 - 40W
110 - 127V / 60 Hz
VDE 0712 EN 61347-60921 tw 130

TYPE	BALLAST						Cp mF ±10% 250 V	LAMP		APPROVALS		PHYSICAL CHARACTERISTICS			
	LAMP		V / Hz	Mains current (A)	Temp. Dt / Dt _{an.}	Diagrams		Length (mm)	Cap		DIMENSIONS		Weight (grs.)	Packing Units	
	Wattage (W)	Current (A)					A (mm)				B (mm)				
ARC-A 13/120/6	1xFD13	0,165	120/60	0,34	55	7	5	517	G5	-		150	138	840	20
ARC-A 18D/120/6	1xFS-18	0,220	120/60	0,42	60	7	7	150	G24d2	-		150	138	840	20
ARC-A 18D/127/6	1xFS-18	0,220	127/60	0,45	60/100	7	7	150	G24d2	-		150	138	840	20
ARC-A 26/120/6	1xFS-26	0,315	120/60	0,63	65	7	9	170	G24d3	-		150	138	840	20
ARC-A 26/127/6	1xFS-26	0,315	127/60	0,63	65	7	9	170	G24d3	-		150	138	840	20
ARC-A 30/110/6	1xFD-30 1xFC-32	0,360 0,410	110/60	0,85	65	7	14	895 307 ∅	G13 G10q	-		150	138	840	20
ARC-A 32/120/6	1xFC-32	0,410	120/60	0,78	65	7	12	307 ∅	G10q	-		150	138	840	20
ARC-A 40/110/6	1xFD-36 1xFD-40	0,390	110/60	0,78	65	7	12	1200	G13	-		150	138	840	20
ARC-A 40/120/6	1xFD-36 1xFD-40	0,390	120/60	0,75	65	7	12	1200	G13	-		150	138	840	20
ARC-A 40/127/6	1xFD-36 1xFD-40	0,390	127/60	0,72	65/170	7	10	1200	G13	*		150	138	840	20

Screw terminal on request

Other wattages, voltages and frequencies are available on request

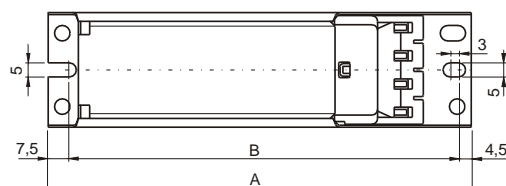

7

