

**BALLASTS FOR
HIGH PRESSURE SODIUM VAPOUR LAMPS
(BUILT-IN USE)**


50 - 1000W

**Operation with Superimposed Ignitor
or Pulse Ignitor (LAYRTON)**

230V / 50 Hz

Up to 100W: Terminal type 1 $\varnothing 1 - 2,5\text{mm}^2$
From 150 to 1000W: Terminal type 3 $\varnothing 1,5 - 4\text{mm}^2$

VDE 0712 EN61347-60923 tw 130


MODEL	TYPE	BALLAST						COMPENSATION $I = 0,95 \pm 0,05$		PHYSICAL CHARACTERISTICS				Packing Units	
		LAMP		V / Hz	Inductive I	Temp. Dt	Diagrams			Parallel mF $\pm 10\%$ 250V	DIMENSIONS				Weight (grs.)
		Wattage (W)	Current (A)					A (mm)	B (mm)		C (mm)	D (mm)			
SAPI-HSI 5/23	SM 50 12201	50	0,76	230/50	0,37	60	15-20 21/26	9	*	106,3	92,3	65	52,3	1075	8
SAPI-HSI 7/23	SM 70 13201	70	1	230/50	0,38	65	15-20 21/26	12	*	106,3	92,3	65	52,3	1375	8
SAPI-HSI 15/23	SM 150 21201	150	1,80	230/50	0,40	65	20 21/26	20	*	117	103	86,6	73	2500	4
SAPI-HSI 25/23	SM 250 22206	250	3	230/50	0,40	70	20 21/26	32	*	127	113	86,6	73	3000	4
SAPI-HSI 25/23/2	SM 250 22201	250	3	230/50	0,40	65	20 21/26	32	*	137	123	86,6	73	3375	4
SAPI-HSI 40/23	SM 400 23201	400	4,45	230/50	0,42	75	20 21/26	50	*	167	153	86,6	73	4700	4
SAPI-HSI 60/23	S 600 34221	600	6,10	230/50	0,46	70	20-26	65	*	148	137,5	102	92	7050	4
SAPI-HSI 100/23	SM 1000 35221	1000	10,3	230/50	0,45	75	20 21/26	100	-	203	192,5	102	92	10800	2

SLIM SECTION (SR)

Terminal type 1 $\varnothing 1 - 2,5\text{mm}^2$

SAPI-HSI 15/23/SR	SM 150 15201	150	1,80	230/50	0,41	70	20 21/26	20	*	135,3	121,3	65	52,3	2050	8
-------------------	--------------	-----	------	--------	------	----	-------------	----	---	-------	-------	----	------	------	---

Other voltages and frequencies are available on request
Available with thermal cut-out. Add "P" to model
Ask for available versions (taps for IG-08 or IG-012DiC)

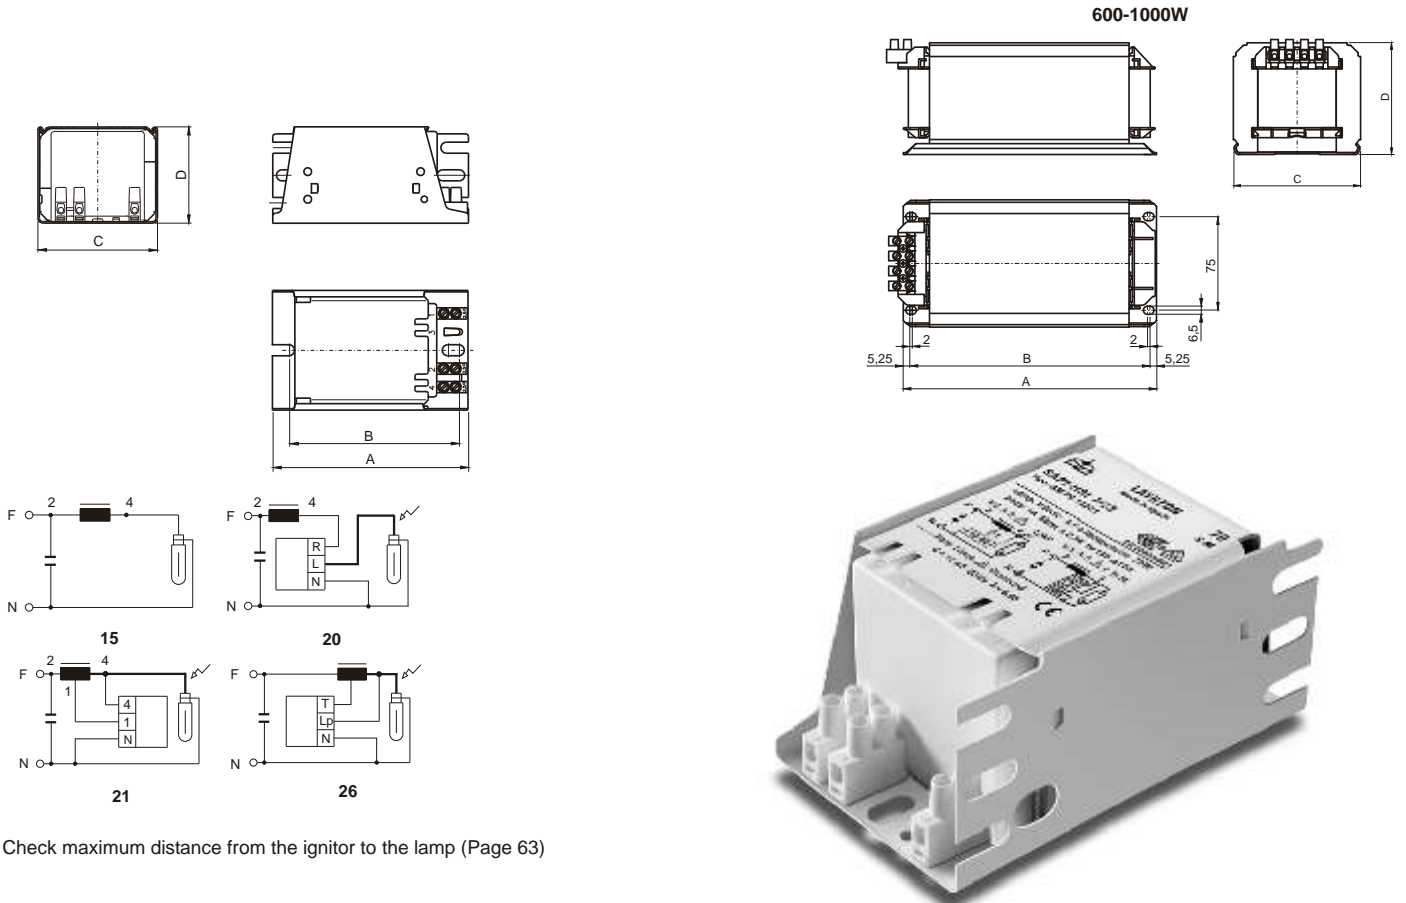

Check maximum distance from the ignitor to the lamp (Page 63)