



**BALLASTS FOR
LOW PRESSURE SODIUM VAPOUR LAMPS
(BUILT-IN USE)**
18 - 55W
230V / 50 Hz

 Terminal type 1 $\varnothing 1 - 2,5 \text{ mm}^2$
VDE 0712 EN 61347-60923 tw 130

TYPE	BALLAST						COMPENSATION $I = 0,95 \pm 0,05$		APPROVALS		PHYSICAL CHARACTERISTICS				Packing Units	
	LAMP		V/Hz	Inductive I	Temp. Dt	Diagrams	Parallel mF $\pm 10\%$ 250V	Mains Current (A)	DIMENSIONS				Weight (grs.)			
	Wattage (W)	Current (A)							A (mm)	B (mm)	C (mm)	D (mm)				
SBPI 18/23	18	0,35	230/50	0,90	55	24	-	0,13			248	140	44	36	900	20

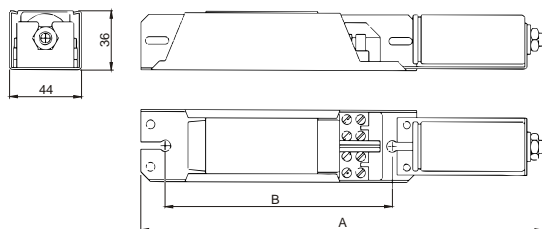

TYPE	BALLAST						COMPENSATION $I = 0,95 \pm 0,05$		APPROVALS		PHYSICAL CHARACTERISTICS				Packing Units	
	LAMP		V/Hz	Inductive I	Temp. Dt	Diagrams	Parallel mF $\pm 10\%$ 250V	Mains Current (A)	DIMENSIONS				Weight (grs.)			
	Wattage (W)	Current (A)							A (mm)	B (mm)	C (mm)	D (mm)				
SBPI 3/23	35	0,60	230/50	0,50	50	25	7	0,32			106,3	92,3	65	52,3	1375	8
SBPI 5/23	55	0,60	230/50	0,50	50	20	7	0,32			106,3	92,3	65	52,3	1375	8

Other voltages and frequencies are available on request

